

ISSN 2518-1491 (Online),
ISSN 2224-5286 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ

Д.В. Сокольский атындағы «Жанармай,
катализ және электрохимия институты» АҚ

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН
АО «Институт топлива, катализа и
электрохимии им. Д.В. Сокольского»

NEWS

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN
JSC «D.V. Sokolsky institute of fuel, catalysis
and electrochemistry»

SERIES
CHEMISTRY AND TECHNOLOGY

3 (441)

MAY – JUNE 2020

PUBLISHED SINCE JANUARY 1947

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of chemistry and technologies scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of chemistry and technologies in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of chemical sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Химия және технология сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Химия және технология сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді химиялық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия химии и технологий» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по химическим наукам для нашего сообщества.

Б а с р е д а к т о р ы
х.ғ.д., проф., ҚР ҰҒА академигі
М.Ж. Жұрынов

Р е д а к ц и я а л қ а с ы:

Ағабеков В.Е. проф., академик (Белорус)
Волков С.В. проф., академик (Украина)
Воротынцев М.А. проф., академик (Ресей)
Газалиев А.М. проф., академик (Қазақстан)
Ергожин Е.Е. проф., академик (Қазақстан)
Жармағамбетова А.К. проф. (Қазақстан), бас ред. орынбасары
Жоробекова Ш.Ж. проф., академик (Қырғыстан)
Иткулова Ш.С. проф. (Қазақстан)
Манташян А.А. проф., академик (Армения)
Пралиев К.Д. проф., академик (Қазақстан)
Баешов А.Б. проф., академик (Қазақстан)
Бүркітбаев М.М. проф., академик (Қазақстан)
Джусипбеков У.Ж. проф., корр.-мүшесі (Қазақстан)
Молдахметов М.З. проф., академик (Қазақстан)
Мансуров З.А. проф. (Қазақстан)
Наурызбаев М.К. проф. (Қазақстан)
Рудик В. проф., академик (Молдова)
Рахимов К.Д. проф., академик (Қазақстан)
Стрельцов Е. проф. (Белорус)
Тәшімов Л.Т. проф., академик (Қазақстан)
Тодераш И. проф., академик (Молдова)
Халиков Д.Х. проф., академик (Тәжікстан)
Фарзалиев В. проф., академик (Әзірбайжан)

«ҚР ҰҒА Хабарлары. Химия және технология сериясы».

ISSN 2518-1491 (Online),

ISSN 2224-5286 (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» Республикалық қоғамдық бірлестігі (Алматы қ.).

Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрағат комитетінде 30.04.2010 ж. берілген №1089-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28; 219, 220 бөл.; тел.: 272-13-19; 272-13-18,
<http://chemistry-technology.kz/index.php/en/arhiv>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2020

Редакцияның мекенжайы: 050100, Алматы қ., Қонаев к-сі, 142, «Д. В. Сокольский атындағы отын, катализ және электрохимия институты» АҚ, каб. 310, тел. 291-62-80, факс 291-57-22, e-mail:orgcat@nursat.kz

Типографияның мекенжайы: «NurNaz GRACE», Алматы қ., Рысқұлов көш., 103.

Главный редактор
д.х.н., проф., академик НАН РК
М.Ж. Журинов

Редакционная коллегия:

Агабеков В.Е. проф., академик (Беларусь)
Волков С.В. проф., академик (Украина)
Воротынцев М.А. проф., академик (Россия)
Газалиев А.М. проф., академик (Казахстан)
Ергожин Е.Е. проф., академик (Казахстан)
Жармагамбетова А.К. проф. (Казахстан), зам. гл. ред.
Жоробекова Ш.Ж. проф., академик (Кыргызстан)
Иткулова Ш.С. проф. (Казахстан)
Манташян А.А. проф., академик (Армения)
Пралиев К.Д. проф., академик (Казахстан)
Баешов А.Б. проф., академик (Казахстан)
Буркитбаев М.М. проф., академик (Казахстан)
Джусипбеков У.Ж. проф., чл.-корр. (Казахстан)
Мулдахметов М.З. проф., академик (Казахстан)
Мансуров З.А. проф. (Казахстан)
Наурызбаев М.К. проф. (Казахстан)
Рудик В. проф., академик (Молдова)
Рахимов К.Д. проф., академик (Казахстан)
Стрельцов Е. проф. (Беларусь)
Ташимов Л.Т. проф., академик (Казахстан)
Тодераш И. проф., академик (Молдова)
Халиков Д.Х. проф., академик (Таджикистан)
Фарзалиев В. проф., академик (Азербайджан)

«Известия НАН РК. Серия химии и технологии».

ISSN 2518-1491 (Online),

ISSN 2224-5286 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан» (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов Министерства культуры и информации Республики Казахстан №10893-Ж, выданное 30.04.2010 г.

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28; ком. 219, 220; тел. 272-13-19; 272-13-18,

<http://chemistry-technology.kz/index.php/en/arhiv>

© Национальная академия наук Республики Казахстан, 2020

Адрес редакции: 050100, г. Алматы, ул. Кунаева, 142, АО «Институт топлива, катализа и электрохимии им. Д.В. Сокольского», каб. 310, тел. 291-62-80, факс 291-57-22, e-mail:orgcat@nursat.kz

Адрес типографии: «NurNaz GRACE», г. Алматы, ул. Рыскулова, 103.

Editor in chief

doctor of chemistry, professor, academician of NAS RK

M.Zh. Zhurinov

Editorial board:

Agabekov V.Ye. prof., academician (Belarus)
Volkov S.V. prof., academician (Ukraine)
Vorotyntsev M.A. prof., academician (Russia)
Gazaliyev A.M. prof., academician (Kazakhstan)
Yergozhin Ye.Ye. prof., academician (Kazakhstan)
Zharmagambetova A.K. prof. (Kazakhstan), deputy editor in chief
Zhorobekova Sh.Zh. prof., academician (Kyrgyzstan)
Itkulova Sh.S. prof. (Kazakhstan)
Mantashyan A.A. prof., academician (Armenia)
Praliyev K.D. prof., academician (Kazakhstan)
Bayeshov A.B. prof., academician (Kazakhstan)
Burkitbayev M.M. prof., academician (Kazakhstan)
Dzhusipbekov U.Zh. prof., corr. member (Kazakhstan)
Muldakhmetov M.Z. prof., academician (Kazakhstan)
Mansurov Z.A. prof. (Kazakhstan)
Nauryzbayev M.K. prof. (Kazakhstan)
Rudik V. prof., academician (Moldova)
Rakhimov K.D. prof., academician (Kazakhstan)
Streltsov Ye. prof. (Belarus)
Tashimov L.T. prof., academician (Kazakhstan)
Toderash I. prof., academician (Moldova)
Khalikov D.Kh. prof., academician (Tadjikistan)
Farzaliyev V. prof., academician (Azerbaijan)

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of chemistry and technology.

ISSN 2518-1491 (Online),

ISSN 2224-5286 (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty).

The certificate of registration of a periodic printed publication in the Committee of Information and Archives of the Ministry of Culture and Information of the Republic of Kazakhstan N 10893-Ж, issued 30.04.2010.

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19; 272-13-18,

<http://chemistry-technology.kz/index.php/en/arhiv>

© National Academy of Sciences of the Republic of Kazakhstan, 2020

Editorial address: JSC «D.V. Sokolsky institute of fuel, catalysis and electrochemistry», 142, Kunayev str., of. 310, Almaty, 050100, tel. 291-62-80, fax 291-57-22, e-mail: orgcat@nursat.kz

Address of printing house: «NurNaz GRACE», 103, Ryskulov str, Almaty.

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

SERIES CHEMISTRY AND TECHNOLOGY

ISSN 2224-5286

<https://doi.org/10.32014/2020.2518-1491.41>

Volume 3, Number 441 (2020), 36 – 43

UDC 502.174.1

A. Leudanski¹, Y. Apimakh¹, A. Volnenko², D. Zhumadullayev²

¹Belorussian State Technological University, Minsk, Belarus;

²M. Auezov South Kazakhstan State University, Shymkent, Kazakhstan.

E-mail: nii_mm@mail.ru, daulet_ospl@mail.ru

**STUDY OF THE EFFECT OF AIR CONSUMPTION,
LIQUID LAYER HEIGHT AND TEMPERATURE ON THE PROCESS
OF FLOTATION SEPARATION OF GROUND PLASTICS**

Abstract. For separation of plastic wastes (polyamide (PA), acrylonitrile butadiene styrene (ABS) and polystyrene (PS)), a flotation method is proposed. Using this method, the effect of air consumption, liquid layer height and temperature were studied. As surface-active substances (surfactants), polidocanol, sulphanol and a mixture of surfactants containing sodium laureth sulfate and diethanolamide were used.

To analyze the research results of flotation separation of a mixture of ground plastic wastes, the extraction of the floating component ϵ and the purity of the concentrate β were calculated.

The research results on the extraction of polystyrene from the air consumption at various concentrations of a mixture of surfactants show that the extraction has a maximum at a certain air consumption. At low air consumption, the process is inefficient, since the working volume of the liquid is not saturated enough with gas bubbles. If the optimum value of air consumption is exceeded, many gas bubbles are formed that are not involved in the flotation process. Such bubbles, moving through a liquid, can create turbulent flows that impede flotation of particles. When moving in a turbulent liquid flow, the bubble-particle complex is prone to destruction, as particles and bubbles have different inertia (mass). In addition, it may be concluded that the air consumption value at which the maximum extraction of the floating component is achieved depends on the type of polymer and surfactant. The air consumption effect nature at different concentrations of surfactants is not changed – only the floating component extraction changes.

The research results on the extraction of polystyrene from the aerated liquid layer height at various concentrations of a mixture of surfactants indicate that at a low height of the aerated liquid layer the probability of collision of a plastic particle with an air bubble is low and some potentially floating particles sink to the bottom of the device, without having time to collide with an air bubble. The optimum height of the processed liquid layer corresponds to a certain air consumption. When the liquid layer height is less than optimal, the achievement of the required extraction degree of the dispersed phase is possible, for example, with an increase in air consumption.

When assessing the effect of liquid temperature on the flotation process, it was found that increasing the liquid temperature above 20°C leads to a sharp decrease in the ABS and PS extraction. This is possibly due to the fact that the dependence of the foaming capacity of surfactants on temperature is characterized by solubility curves and for most surfactants they have an extremum. Probably, an increase in the solution temperature leads to the dehydration of the dissolved surfactant molecules. Moreover, they separate as an independent macrophase, which leads to a decrease in the number of surfactant molecules involved in the flotation process.

Key words: flotation, plastic wastes, surfactants, concentration, air consumption, liquid layer height, temperature.

Introduction. In the world there is a constant increase in the consumption of polymer materials (PM) [1, 2], which occupy a leading position in terms of production of raw materials.

The accelerated growth in the production of polymer materials and the expansion of their applications in various industries is explained by their manufacturability, ease, convenience, cost-effectiveness, safety, a set of valuable operational properties and high aesthetics. Plastics are serious competitors to glass, ceramics and metal [3].

At the same time, the use of products from polymer materials certainly causes waste formation. The increase in PM production and consumption inevitably entails an increase in the amount of their wastes.

In recent years, the problem of processing plastic wastes has become to take an important place in the world, since the bulk of wastes is destroyed by inefficient methods [4-8].

Promising processes for the PM separation are flotation based on different wettability, since they are quite simple in hardware and reliable. The flotation process is close to the sedimentation process in flotation baths, which is widely used in the world. The flotation process may allow to separate plastics with fairly similar or equal densities. This requires the presence of surfactants and gas bubbles in the working volume of the device [9, 11].

Research methods. The methodology for experimental research of the flotation process of separation of plastics is as follows. It is necessary to prepare in advance a charge of the investigated ground plastics with a mass $m_{\text{исх}}$. Due to the complexity of further manual sorting of the concentrate in a multilateral research of the flotation process, it is recommended to feed a charge of a mixture of ground plastics weighing about 10 g. In a laboratory setup, it is possible to study the dependences of the extraction of certain types of plastics on physical and operational factors, while the charge with a mass $m_{\text{исх}}$ containing one type of ground plastic is fed to the flotation. It is also possible to study the separation of a mixture of several types of ground plastics. In the second case, the charge with a mass $m_{\text{исх}}$ should contain particles of ground hydrophobic plastic with a mass $m_{\text{исх}}^{\text{фл}}$ and particles of ground hydrophilic plastic with a mass $m_{\text{исх}}^{\text{ос}}$. When studying the separation of plastics, it is recommended to feed a mixture of plastics to the flotation in a 1:1 ratio.

Research results. In [12], the authors presented the research results of the effect of the concentration of surface-active substances (surfactants) on the process of separation of plastic wastes. The tables with experimental data presented in this work contain the results obtained by changing the air consumption, the liquid layer height and its temperature. When conducting the research, the plastic wastes were polyamide, acrylonitrile butadiene styrene and polystyrene. As surface-active substances, polidocanol, sulphanoole and a mixture of surfactants containing sodium laureth sulfate and diethanolamide were used [13-15].

To analyze the research results of the flotation separation of a mixture of ground plastic wastes, the extraction of the floating component ε and the purity of the concentrate β were calculated by the formulas [16]:

$$\varepsilon = \frac{m_{\text{конц}}^{\text{фл}}}{m_{\text{исх}}^{\text{фл}}} \cdot 100\%, \quad (4.1)$$

$$\beta = \frac{m_{\text{конц}}^{\text{фл}}}{m_{\text{конц}}} \cdot 100\%, \quad (4.2)$$

where $m_{\text{конц}}^{\text{фл}}$ – a mass of the floating component (the particles of the ground hydrophilic plastic in the concentrate, kg; $m_{\text{исх}}^{\text{фл}}$ – a mass of the floating component (the particles of the ground hydrophilic plastic in the initial charge, kg; $m_{\text{конц}}$ – a mass of the concentrate, kg.

According to the calculation results of the extraction of the floating component ε and the purity of the concentrate β from the air consumption during the flotation separation of the mixture of the ground polyamide and acrylonitrile butadiene styrene using various surfactants, the dependences were obtained which are shown in figures 1-3.

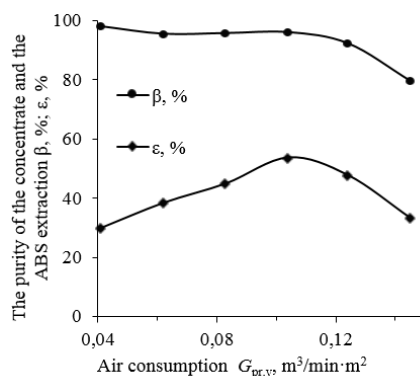


Figure 1 - Dependences of the purity of the concentrate and the ABS extraction from the air consumption at the concentration of sulphanoole $11.56 \cdot 10^{-3} \text{ kg/m}^3$

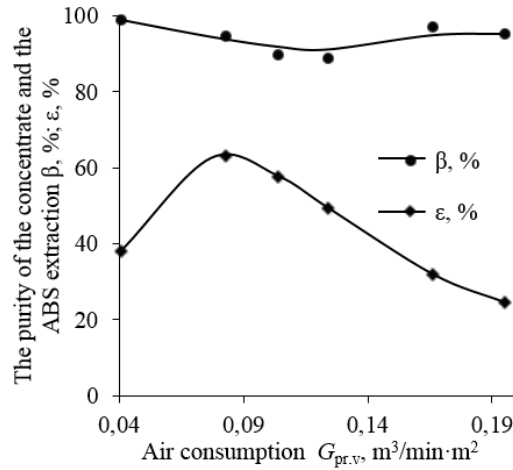


Figure 2 - Dependences of the purity of the concentrate and the ABS extraction from the air consumption at the concentration of polidocanol $8.89 \cdot 10^{-3} \text{ kg/m}^3$

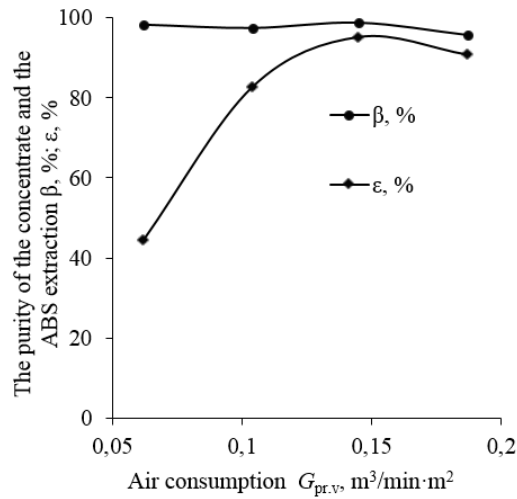


Figure 3 – Dependences of the purity of the concentrate and the ABS extraction from the air consumption at the concentration of the mixture of surfactants $2.7 \cdot 10^{-3} \text{ kg/m}^3$

Further, according to the results given in [12], the dependences of the PS extraction on the air consumption are presented, obtained at the concentration of the mixture of surfactants of $5.41 \cdot 10^{-3}$ and $16.22 \cdot 10^{-3} \text{ kg/m}^3$ (figure 4.).

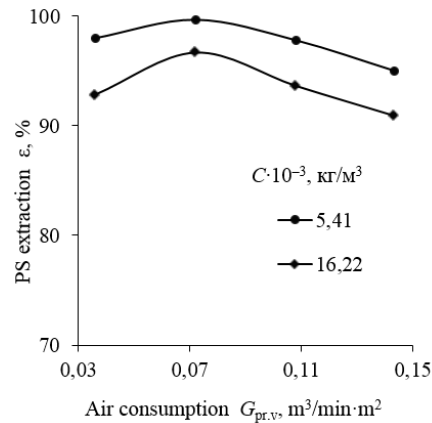


Figure 4 - Dependences of the PS extraction on the air consumption at various concentrations of the mixture of surfactants

As is seen from figures 1-4, the extraction has a maximum at a certain air consumption. The presence of the maximum extraction of the floating component in these figures suggests a characteristic effect of the air consumption on the flotation process of polymers. At low air consumptions, the process is inefficient, since the working volume of the liquid is not saturated enough with gas bubbles. If the optimum value of the air consumption is exceeded, many gas bubbles are formed that are not involved in the flotation process. Such bubbles, moving through a liquid, can create turbulent flows that impede the flotation of particles. When moving in the turbulent liquid flow, the bubble-particle complex is prone to destruction, as particles and bubbles have different inertia (mass) [17].

Also, from the above dependences, it may be concluded that the air consumption value at which the maximum extraction of the floating component is achieved depends on the type of polymer and surfactant. The air consumption effect nature at different concentrations of surfactants is not changed – only the floating component extraction changes.

When using polidocanol, the maximum extraction of ABS is 17% higher than when using sulphanoole, and reaches 70.5%. However, the purity of the concentrate in this case is reduced by 2.5%, namely, to 93.5% [18]. When using the mixture of surfactants containing sodium laureth sulfate and diethanolamide, the ABS extraction reaches 95%, and the purity of the concentrate is 98.7%. And when using the same mixture of surfactants during the PS flotation, its extraction reaches 99%.

To determine the optimal height of the aerated working liquid layer from the experimental data presented in [12], the dependences of the PS extraction on the concentration of surfactants were determined at different heights of the aerated liquid layer, which are shown in figure 5.

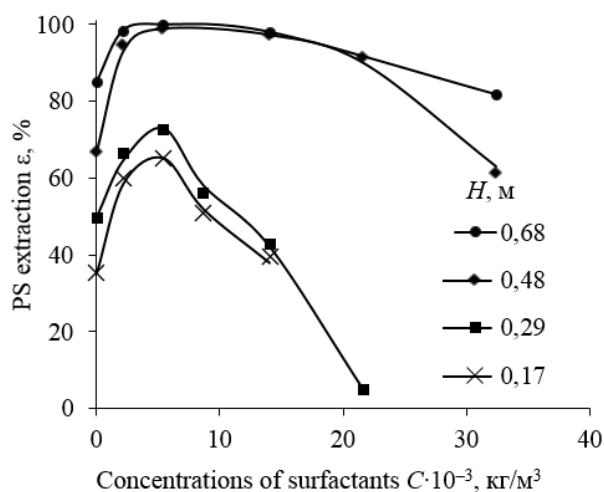


Figure 5 - Dependences of the PS extraction on the concentrations of surfactants at various heights of the aerated liquid layer

As is seen from figure 5, the PS extraction has a maximum at a low concentration of surfactants, namely $5.41 \cdot 10^{-3} \text{ kg/m}^3$, and reaches 99% with a sufficient height of the aerated liquid layer.

At a low height of the aerated liquid layer, the probability of collision of a plastic particle with an air bubble is low and some potentially floating particles sink to the bottom of the device, without having time to collide with an air bubble. The optimum height of the processed liquid layer H_0 corresponds to a certain air consumption. When the liquid layer height is less than optimal ($H_* < H_0$) the achievement of the required extraction degree of the dispersed phase is possible, for example, with an increase in the air consumption [19].

In order to more clearly display the effect of the aerated liquid layer height on the PS extraction, the corresponding dependences were obtained at the concentration of surfactants of $2.16 \cdot 10^{-3}$ and $5.41 \cdot 10^{-3} \text{ kg/m}^3$, shown in figure 6.

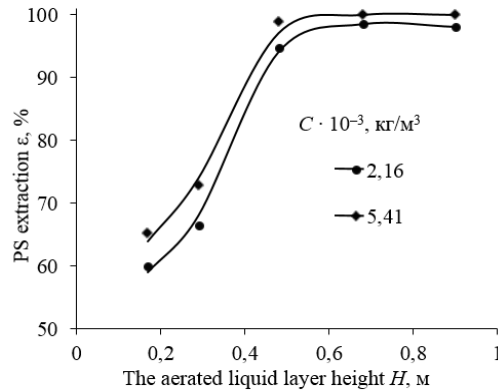


Figure 6 - Dependences of the PS extraction on the aerated liquid layer height at various concentrations of surfactants

As is seen from figure 6, a sufficient height of the aerated liquid layer is 0.5-0.6 m, its further increase does not have a strong effect on the PS extraction. Exceeding the optimum height of the aerated liquid layer leads to an increase in the material consumption of the device and an increased consumption of the working liquid and surfactant, as well as to an increase in the length of the movement of the bubble-particle complexes, which can increase the probability of their destruction [19].

The graphical dependences given above, as well as in [12], were obtained without additional heating of the working liquid (about 10-15°C). In assessing the effect of the liquid temperature on the flotation process, the experimental research was conducted, the results of which are reflected in [12]. After processing the results of this experimental research, the dependences of the ABS and PS flotation indices on the liquid temperature t were plotted, shown in figure 7, 8.

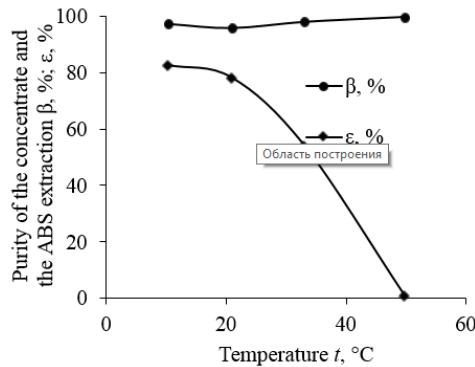


Figure 7 - Dependences of the purity of the concentrate and the ABS extraction on the liquid temperature at the concentration of the mixture of surfactants, containing sodium laureth sulfate and diethanolamide, $2.7 \cdot 10^{-3}$ kg/m³ and at the air consumption of 0.104 m³/min·m²

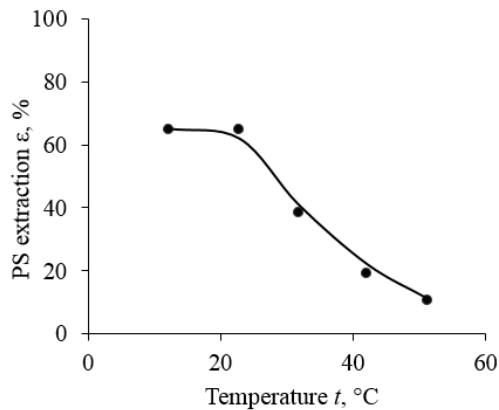


Figure 8 – Dependence of the PS extraction on the liquid temperature at the aerated liquid layer height of 0.17 m, the concentration of the mixture of surfactants of $5.41 \cdot 10^{-3}$ kg/m³ and the air consumption of 0.072 m³/h·m²

As is seen from figures 7 and 8, an increase in the liquid temperature above 20°C leads to a sharp decrease in the ABS and PS extraction. It should be noted that in Figures 7 and 8 there is a pattern of the liquid temperature effect on the extraction of floating components. This is possibly due to the fact that the dependence of the foaming capacity of surfactants on the temperature is characterized by the solubility curves and for most surfactants they have an extremum [20, 21]. Probably, an increase in the solution temperature leads to the dehydration of the dissolved surfactant molecules. Moreover, they separate as an independent macrophase, which leads to a decrease in the number of surfactant molecules involved in the flotation process.

Conclusions. For separation of plastic wastes (polyamide, acrylonitrile butadiene styrene and polystyrene), the flotation method is proposed using surfactants (polidocanol, sulphanol and the mixture of surfactants containing sodium laureth sulfate and diethanolamide). When conducting this method, the effect of the air consumption, the liquid layer height and the temperature were studied.

The research results on the extraction of the floating component from the air consumption show that its maximum extraction depends on the type of polymer and surfactant. The air consumption effect nature at different concentrations of surfactants is not changed – only the floating component extraction changes.

The research results on the extraction of the floating component from the aerated liquid layer height show that the optimum height of the processed liquid layer corresponds to a certain air consumption, and when the liquid layer height is less than optimal, the achievement of the required extraction degree of the dispersed phase is possible, for example, with an increase in the air consumption.

When assessing the effect of the liquid temperature on the flotation process, it was found that increasing the liquid temperature above 20°C leads to the sharp decrease in the ABS and PS extraction. This is due to the fact that the dependence of the foaming capacity of surfactants on the temperature is characterized by the solubility curves and for most surfactants they have an extremum.

А. Левданский¹, Е. Опимах¹, А. Волненко², Д. Жумадуллаев²

¹ Беларусь мемлекеттік технологиялық университеті, Минск, Беларусь;

² М. Әуезов атындағы Оңтүстік Қазақстан мемлекеттік университеті, Шымкент, Қазақстан

**Ұсақталған пластмассаларды флотациялық бөлу үдерісінің
ауа шығыны, сұйықтық қабатының биіктігі
және температура әсерін зерттеу**

Аннотация. Пластмасса қалдықтарын бөлу үшін (полиамид (ПА), акрилонитрилбутадиенстирол (АБС) және полистирол (ПС) флотациялық әдіс ұсынылды. Аталған әдісті қолдану арқылы ауа шығыны, сұйықтық қабатының биіктігі және температураның әсері зерттелді. Беттік-белсенді заттар (ПБЗ) ретінде синтанол, сульфанол және құрамында натрий лаууретсульфаты және диэтаноламид бар ПБЗ қоспасы қолданылды.

Пластмассаның ұсақталған қалдықтары қоспасының флотациялық бөлінуін зерттеу нәтижелерін талдау үшін флотацияланатын компонентті бөлу және β концентрациясының тазалығы есептелді.

ПБЗ қоспасының әр түрлі концентрациясы кезінде полистиролды ауа шығынынан бөліп алу зерттеулерінің нәтижелері ауаның кейбір шығынында ең көп шығарылу бар екенін көрсетеді. Ауаның аз шығынында процесс тиімсіз өтеді, өйткені сұйықтықтың жұмыс көлемі газ көпіршіктерімен жеткіліксіз қанығады. Ауа шығысының оңтайлы мәнінен асқан кезде флотация процесіне қатыспайтын көп газ көпіршіктері пайда болады. Мұндай көпіршіктер сұйықтық арқылы қозғала отырып, бөлшектердің флотациясына кедергі келтіретін турбулентті ағындарды жасай алады. Сұйықтықтың турбуленттік ағынында қозғалғанда "көпіршік – бөлшектер" кешені қирауға бейім, себебі бөлшектер мен көпіршіктер әртүрлі инерционды (масса) болады. Сонымен қатар, флотацияланатын компонентті барынша алуға қол жеткізетін ауа шығынының мәні полимер мен ПБЗ түріне байланысты екендігі туралы қорытынды жасауға болады. ПБЗ әртүрлі шоғырлануы кезінде ауа шығынының әсер ету сипаты өзгермейді-флотацияланатын компонентті алу ғана өзгереді.

Полистиролды ПБЗ қоспасының әр түрлі концентрациясы кезінде сұйықтықтың әуірленетін қабатының биіктігінен бөліп алуды зерттеу нәтижелері сұйықтықтың әуірленетін қабатының аз биіктігі кезінде пластмасса бөлшектің ауа көпіршігімен соқтығысу ықтималдығы төмен және кейбір әлеуетті флотацияланатын бөлшектер аппараттың түбіне түсіріледі, сонымен қатар ауа көпіршігімен соқтығыспай-ақ. Өңделетін сұйықтық қабатының оңтайлы биіктігіне ауаның белгілі бір шығыны сәйкес келеді. Ал сұйық

кабатының биіктігі дисперсиялық фазаны алудың қажетті деңгейіне оңтайлы жетуден азырақ, мысалы, ауа шығыны жоғарылаған кезде мүмкін.

Флотация процесіне сұйықтық температурасының әсерін бағалау кезінде сұйықтық температурасының 20 ° С-тан жоғары көтерілуі АБС және КС шығуының күрт төмендеуіне әкеледі. Бұл ПБЗ-ның көбіктеу қабілетінің температураға тәуелділігі ерігіштің қисығымен сипатталады және ПБЗ-ның көпшілігі үшін экстремуммен түсіндіріледі. Ерітіндінің температурасының жоғарылауы баз ерітілген молекулаларының дегидратациясына әкеп соқтыруы мүмкін. Бұл ретте олар жеке макрофаз түрінде бөлінеді, бұл флотация процесіне қатысатын ПБЗ молекулаларының санының төмендеуіне әкеледі.

Түйін сөздер: флотация, пластмасса қалдықтары, беттік белсенді заттар, концентрация, ауа шығыны, сұйықтық қабатының биіктігі, температура.

А. Левданский¹, Е. Опимах¹, А. Волненко², Д. Жумадуллаев²

¹Белорусский государственный технологический университет, Минск, Беларусь;

²Южно-Казахстанский государственный университет им. М. Ауэзова, Шымкент, Казахстан

ИЗУЧЕНИЕ ВЛИЯНИЯ РАСХОДА ВОЗДУХА, ВЫСОТЫ СЛОЯ ЖИДКОСТИ И ТЕМПЕРАТУРЫ НА ПРОЦЕСС ФЛОТАЦИОННОГО РАЗДЕЛЕНИЯ ИЗМЕЛЬЧЕННЫХ ПЛАСТМАСС

Аннотация. Для разделения отходов пластмасс (полиамида (ПА), акрилонитрилбутадиенстирола (АБС) и полистирола (ПС)) предложен флотационный способ. С использованием указанного способа изучено влияние расхода воздуха, высоты слоя жидкости и температуры. В качестве поверхностно-активных веществ (ПАВ) использовались синтанол, сульфанол и смесь ПАВ, содержащая лауретсульфат натрия и диэтаноламид.

Для анализа результатов исследований флотационного разделения смеси измельченных отходов пластмасс были рассчитаны извлечение флотируемого компонента ϵ и чистота концентрата β .

Результаты исследований извлечения полистирола от расхода воздуха при различной концентрации смеси ПАВ показывают, что извлечение имеет максимум при некотором расходе воздуха. При малых расходах воздуха процесс протекает неэффективно, так как рабочий объем жидкости недостаточно насыщается пузырьками газа. При превышении оптимального значения расхода воздуха образуется много газовых пузырьков, не участвующих в процессе флотации. Такие пузырьки, двигаясь через жидкость, могут создавать турбулентные потоки, препятствующие флотации частиц. При движении в турбулентном потоке жидкости комплекс «пузырек – частица» склонен к разрушению, поскольку частицы и пузырьки имеют различную инерционность (массу). Кроме того, можно сделать вывод о том, что значение расхода воздуха, при котором достигается максимальное извлечение флотируемого компонента, зависит от типа полимера и ПАВ. Характер влияния расхода воздуха при различной концентрации ПАВ не изменяется – изменяется лишь извлечение флотируемого компонента.

Результаты исследований извлечения полистирола от высоты аэрируемого слоя жидкости при различной концентрации смеси ПАВ свидетельствуют о том, что при малой высоте аэрируемого слоя жидкости вероятность столкновения пластмассовой частицы с пузырьком воздуха низкая и некоторые потенциально флотируемые частицы опускаются на дно аппарата, так и не успев столкнуться с пузырьком воздуха. Оптимальной высоте слоя обрабатываемой жидкости соответствует определенный расход воздуха. А при высоте слоя жидкости меньше оптимальной достижение необходимой степени извлечения дисперсной фазы возможно, например, при повышении расхода воздуха.

При оценке влияния температуры жидкости на процесс флотации установлено, что повышение температуры жидкости выше 20°C приводит к резкому снижению извлечения АБС и ПС. Это, возможно, объясняется тем, что зависимость пенообразующей способности ПАВ от температуры характеризуется кривыми растворимости и для большинства ПАВ они имеют экстремум. Вероятно, повышение температуры раствора приводит к дегидратации растворенных молекул ПАВ. При этом они выделяются в виде отдельной макрофазы, что приводит к снижению количества молекул ПАВ, участвующих в процессе флотации.

Ключевые слова: флотация, отходы пластмасс, поверхностно-активные вещества, концентрация, расход воздуха, высота слоя жидкости, температура.

Information about authors:

Apimakh Yauheni Vladimirovich - Candidate of Technical Science teacher of the Department "Processes and Apparatuses of Chemical Production", Belorussian State Technological University, e-mail: alex_levdansky@mail.ru, <https://orcid.org/0000-0003-2830-6856>;

Leudanski Aliaksandr Eduardovich - Doctor of Technical Sciences, Associate Professor of the Department "Processes and Apparatuses of Chemical Production", Belorussian State Technological University, e-mail: alex_levdansky@mail.ru, <https://orcid.org/0000-0003-2684-7771>;

Volnenko Alexandr Anatolevich - Doctor of Technical Sciences, Professor of the Department of Technological Machines and Equipment, M.Auezov South Kazakhstan State University, e-mail: nii_mm@mail.ru, <https://orcid.org/0000-0001-6800-9675>;

Zhumadullayev Daulet Koshkarovich - PhD, senior teacher of the Department of Technological Machines and Equipment, M.Auezov South Kazakhstan State University, e-mail: daulet_ospl@mail.ru, <https://orcid.org/0000-0002-6552-2817>

REFERENCES

- [1] Ponomareva, V.T. Use of plastic wastes abroad / V.T. Ponomareva, N.N. Likhacheva, Z.A. Tkachik // Plastic masses. 2002. № 5. P. 44-48.
- [2] Recycling of plastics: structure and properties, additives, equipment, application: collection / ed. F. La Mantle; trans. from English under the editorship of G.E. Zaikova. SPb.: Profession [et al.], 2006. 397 p.
- [3] Utilization of polymer containers and packaging: teaching aid / A.S. Klinkov [et al.]. Tambov: Publishing house of Tambov State Technical University, 2008. – 62 p.
- [4] Manulenko, A.F. Recycling of plastics: teaching methodical aid / A.F. Manulenko, V.V. Yatsenko. Minsk: Belorussian State Technological University, 2013. 130 p.
- [5] Recycling of polymer materials: collection of articles / ed. E.G. Lyubeshkina. M.: Chemistry, 1985. 192 p.
- [6] Technologies for processing of plant biomass, technical rubber and plastic / D.V. Aristarkhov [et al.] // Engineering Physical Journal. 2001. № 6. P. 152–156.
- [7] Kaminsky, W. Pyrolysis with respect to recycling of polymer / W. Kaminsky // Die Angew. Makromolekulare Chemie. 1995. Vol. 232, № 1. P. 151–165.
- [8] Shayers, D. Recycling of plastics: science, technology, practice / D. Shayers; trans. from English: Yu. Taperov [et al.]. SPb.: Scientific foundations and technologies, 2012. 639 p.
- [9] The flotation separation method of a mixture of ground plastics: application BY 20150142 / E.V. Opimah, A.E. Levdanskiy, D.I. Chirkun, D.G. Kalishuk, N.P. Saevich. Publ. 12.03.2015.
- [10] E.V. Opimah, A.E. Levdanskiy. Flotation separation of a mixture of polymers // Chemical technology and technics: abstracts of reports of 77th scientific and technical conference of teaching staff, researchers and postgraduates, Minsk, 4-9 February 2013 / Belarussian State Technological University. Minsk, 2013. P. 34.
- [11] Opimah, E.V. Flotation extraction of polystyrene / E.V. Opimah // Polymer composites and tribology (Policomtrib – 2015): International scientific technical conference, Gomel, 23-26 June 2015: abstracts of reports / the NAS of Belarus [et al.]; ed. V.N. Aderikha [et al.]. Gomel, 2015. P. 176.
- [12] Levdanskiy A.E., Opimah E.V., Volnenko A.A., Zhumadullayev D.K. Study of effect of surfactants' concentration on the flotation separation of ground plastics // Bulletin of KazNITU. 2019. № 6 (136), 2019. P. 893 – 900.
- [13] Volkov, V.A. Surface-active substances. Synthesis and properties / V.A. Volkov. M.: Legprombytizdat, 1985. 354 p.
- [14] Surface-active substances and compositions: reference guide / ed. M.Yu. Pletnev. M.: Klavel, 2002. 768 p.
- [15] Cation-active surfactants – effective inhibitors in technological processes of the oil and gas industry / N.A. Petrov [et al.]; under the general. ed. F.A. Agzamov. SPb.: Nedra, 2004. 408 p.
- [16] Abramov, A.A. Flotation enrichment methods: textbook / A.A. Abramov. M.: Nedra, 1984. 383 p.
- [17] Levdanskiy, A.E. Flotation separation of polystyrene / A.E. Levdanskiy, E.V. Opimah // One hundred specific steps. The modern state for all is the strategic path of the industrial and innovative development of the country: Proceedings of International scientific practical conference / South Kazakhstan State University; Editorial: Zh.U. Myrkhalykov (resp. ed.) [et al.]. Shymkent, 2015. P. 92-98.
- [18] Opimah, E.V. The method of flotation separation of a mixture of polymers of acrylonitrile butadiene styrene and polyamide / E.V. Opimah, A.E. Levdanskiy // Energy - and material-saving environmentally friendly technologies: abstracts of reports of X international scientific technical conference, Grodno, 15-16 October 2013 / the NAS of Belarus [et al.]; editorial: A.I. Sviridenok (ch. ed.) [et al.]. Grodno, 2013. P. 59-60.
- [19] Foam separation and column flotation / Yu.I. Rubinstein [et al.]. M.: Nedra, 1989. 303 p.
- [20] Lange, K.R. Surfactants: synthesis, properties, analysis, application / K.R. Lange; scientific ed. L.P. Zaichenko; trans. from English N. Zorin. SPb.: Profession, 2007. 240 p.
- [21] Apimakh Ye.V., Leudanski A.E., Volnenko A.A., Zhumadullaev D.K. Methods of carrying out flotation processes // News of The National Academy of Sciences of The Republic of Kazakhstan. Series Chemistry and Technology. 2018. №5 (431), P. 82-91. <https://doi.org/10.32014/2018.2518-1491.11>

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации
в журнале смотреть на сайте:

www.nauka-nanrk.kz

<http://chemistry-technology.kz/index.php/en/arhiv>

ISSN 2518-1491 (Online), ISSN 2224-5286 (Print)

Редакторы: *М. С. Ахметова, Г. Б. Халидуллаева, Д. С. Аленов*
Верстка на компьютере *А.М. Кульгинбаевой*

Подписано в печать 08.06.2020.

Формат 60x88¹/₈. Бумага офсетная. Печать – ризограф.
10,8 п.л. Тираж 300. Заказ 3.