ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ
Әль-фараби атындағы Қазақ ұлттық университетінің

ХАБАРЛАРЫ

ИЗВЕСТИЯ	N E W S
НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК РЕСПУБЛИКИ КАЗАХСТАН Казахский национальный университет имени Аль-фараби	OF THE NATIONAL ACADEMY OFSCIENCES OF THE REPUBLIC OF KAZAKHSTAN Al-farabi kazakh national university

SERIES
PHYSICO-MATHEMATICAL

2 (324)

MARCH - APRIL 2019

PUBLISHED SINCE JANUARY 1963

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

N E W S

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

PHYSICO-MATHEMATICAL SERIES

A.S. Askarova[1-2], S.A. Bolegenova[1-2], P. Safarik[3],
V.Yu. Maximov[1], S.A. Bolegenova[2], A.O. Nugymanova[1*]

[1]al-Farabi Kazakh National University, Faculty of Physics and Technology, Almaty, Kazakhstan;
[2]Scientific Research Institute of Experimental and Theoretical Physics
of al-Farabi Kazakh National University, SRI ETP of KazNU, Almaty, Kazakhstan;
[3]Czech Technical University in Prague, Faculty of Fluid Dynamics and Thermodynamics, Prague, Czech Republic
com: aliya.askarova@kaznu.kz, saltanat.bolegenova@kaznu.kz, pavel.safarik@fs.cvut.cz,
valeriy.maximov@kaznu.kz, bolegenova.symbat@kaznu.kz, aizhan.nugymanova@kaznu.kz

3D MODELING OF COMBUSTION
THERMOCHEMICAL ACTIVATED FUEL

Abstract. This article presents the results of numerical research of plasma thermochemical processes of preparing solid fuels for combustion in combustion chambers. During the numerical experiments have been applied the newest information technology and method of 3-D computer modeling of heat and mass transfer in the furnace space. Received the basic laws of convective heat and mass transfer in turbulent flows in the presence of chemical reactions using modern numerical methods, giving a complete description of the complex processes occurring in a real combustion chamber. Research of three-dimensional temperature and concentration fields has allowed establishing laws of the development of the combustion process in the entire volume of the object under study. Satisfactory agreement is obtained estimates with known results of natural experiments. Authors of article for the first time investigate influence of plasma thermochemical treatment of pulverized coal flows on the main characteristics of the physicochemical processes of solid fuel combustion. It has been established that the method of thermochemical activation of pulverized coal flows makes it possible to significantly optimize the process of burning low-grade high-ash Kazakhstan coal in the combustion chambers of the thermal power plants of Kazakhstan, significantly reduce emissions of harmful substances into the environment and create a way to obtain "clean" energy on energy facilities.

Key words. Heat and mass transfer, combustion, solid fuel, plasma activation, aerodynamic flow, concentration and temperature field, emissions of harmful substances.

Introduction

Studies of heat and mass transfer in high-temperature and chemically reacting environments are important at creation of new physical and chemical technologies, at design of aviation and rocket technics, by development new furnaces, gas turbines and internal combustion engines. In the conditions of depletion of natural energy resources and environmental pollution, the development of technological processes with the rational use of energy fuel and the solution of environmental problems are urgent and most important tasks for many thermophysical studies in this direction.

Heat and mass transfer processes in the presence of physical-chemical transformations and combustion are non-stationary, strongly non-isothermal with constant changes in the physical and chemical state of the environment, which greatly complicates them both experimental and theoretical study. Such flows are described by a complex system of non-autonomous nonlinear partial differential equations, in which the essential turbulence, multiphase nature of the medium, and source terms associated with the chemical kinetics of the processes occurring must be taken into account [1-5].

The main methods of study of such processes, particularly in the areas of real geometry are methods of numerical simulation and holding on to them through computational experiments adequately reflect the real physical processes, occurring in combustion chambers. Progress in the development of computational models, in the creation of effective computational algorithms and problem-oriented software packages allows us to solve many problems that have a huge practical application for various industries, especially for energy [6-11].

In this article is carried out of heat and mass transfer processes occurring in the areas of real geometry (combustion chamber), with the burning of energy fuel in them. The basic patterns and features of the formation of the aerodynamics of flow, velocity, temperature and concentration fields are established and the effect of plasma thermochemical treatment of pulverized coal on the main characteristics of the combustion process is shown.

This research builds on the achievements of modern thermal physics, on the use of new numerical methods for 3-D modeling, on the construction of efficient computational algorithms and new computational models, which make it possible to more accurately describe the actual physical and chemical processes occurring during at burning of power fuel in the combustion chambers of existing energy facilities [12-15].

Statement of the problem of burning thermochemically activated torch in the combustion chamber of an energy boiler

Thermochemical preparation of pulverized coal for combustion is implemented in accordance with the following mechanism. Aero mixture is fed through the dust pipe to the burner. According to the traditional scheme, the air mixture is fed into the "cold" hot fire chamber (T about 350K), then it heats up and ignites. If the burner is equipped with a plasma torch, then the air mixture is heated by the plasma torch in the volume of the burner to the exit to the furnace. In this case, volatile coal is emitted and the coke residue is gasified. Gasification and volatile products begin to oxidize with oxygen of the primary air of the air mixture, which leads to additional heating of the reaction air of the air mixture. At the same time, carbon of the fuel is gasified to CO, and not to CO_2, due to the existing coefficient of excess air in the air mixture (0.3-0.5 of the stoichiometric ratio) [13].

As a result, the output of plasma-fuel system (PFS) a high-temperature (about 1300K) reactive flow of carbon-containing particles and gaseous products of the plasma thermochemical preparation aero mixture. In this case, regardless of the quality of the original product, we get highly reactive two-component fuel. When mixed with secondary air in the combustion chamber, it is intensely ignited and burns steadily without fuel oil or gas, traditionally used to ignite and stabilize the combustion of low-grade pulverized coal [14-15].

To carry out computational experiments, the combustion chamber of the BKZ-420 boiler of the Almaty Thermal Power Plant-2 has been chosen [16-17]. The BKZ-420 steam boiler with a 420 t/h steam capacity is equipped with six rotary pulverized coal burners located in two levels with three burners on the front wall of the boiler (Fig. 1 a).

At computer simulation, the method of control volumes which is applied to numerically solve differential equations describing heat and mass transfer in the combustion chamber, and is described in detail in the following papers [18-21].

For this, the combustion chamber of the boiler under study is divided into small control volumes, the number of which depends on the geometry of the combustion chamber, its dimensions, and the location of the burner and plasma devices. For the BKZ-420 boiler, the calculated area is – 261008 control volumes (72x139x126) (Fig. 1 b).

When conducting computational experiments for the boiler BKZ-420 were investigated two modes of operation of the combustion chamber: 1) traditional combustion (burner works with standard pulverized coal burners); 2) the plasma torch is installed and operates on a pulverized coal flow in three burners: two extreme burners of the lower tier and a central burner of the upper tier [22-29].
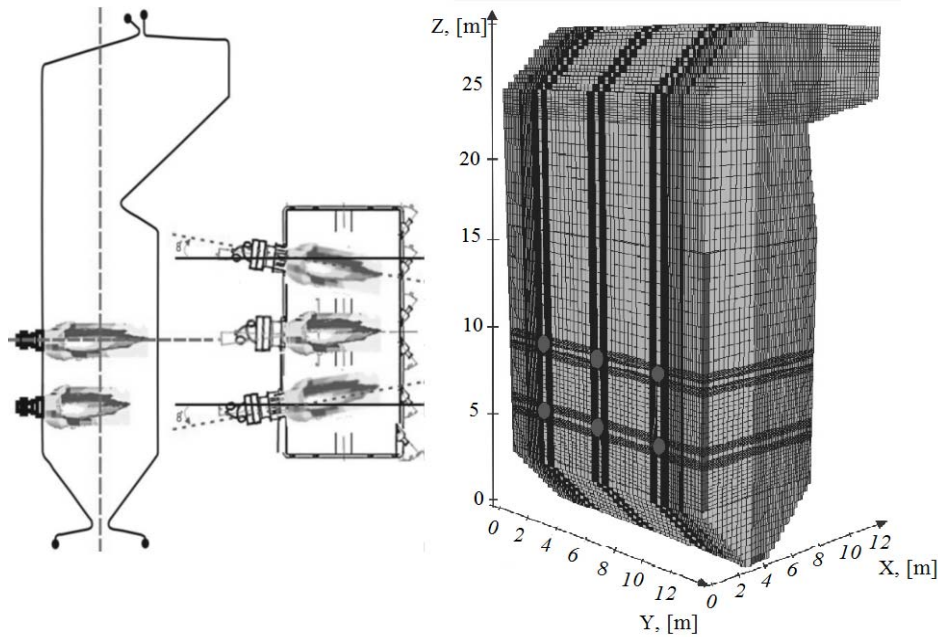
Fig. 1. General view of the combustion chamber of the boiler BKZ-420:
configuration of torches (on left); breakdown into control volumes (on right)

The results of computational experiments

Below are the results of 3D computer simulation of the study of the influence of thermochemical activation of pulverized coal flows on the combustion process of a pulverized coal flame in the combustion chamber of the BKZ-420 boiler.

The aerodynamics of the flow (distribution of the full velocity vector), temperature and concentration fields of nitrogen oxides NO over the entire combustion space of the combustion chamber were obtained for the traditional combustion of fuel and for the case when the plasma torch in the three burners affects the pulverized coal.

Figure 2 shows the aerodynamics of the flow and the distribution of the full velocity vector in the belt region of the burners of the combustion chamber. Analysis of the figure shows that the thermochemical activation of the pulverized coal flow has a significant impact on the flow field on the propagation of the reacting jet in the furnace volume, mixing processes in the jet, on the size and shape of the flame. This can be explained by the fact that, under the action of plasma activation of pulverized jets, turbulization of flows is intensified, and this in turn leads to acceleration of mass and heat exchange associated with increased mixture formation, additional heating of the air mixture and intensification of the burning process.

Figure 3 illustrates the temperature field in the sectional plane of the burners of the lower tier of the combustion chamber of the boiler BKZ-420. Compared with the combustion of a conventional pulverized coal stream, the average temperature in this area in the case of using thermochemically activated streams increases and is 1530°C without activation, and 1640°C for 3 activated streams.

It can be concluded that the plasma activation of the aerosol leads to its rapid heating, ignition and stable heating. At the same time, there is a shift of the combustion front to the location of plasma activation systems of coal streams. The region of high temperatures with increasing number of plasma-activated flows is shifted to the center of symmetry of the furnace, while at the side surfaces a higher temperature level.

Figure 4 shows a comparative analysis of the distribution of the average temperature in the cross section over the height of the combustion chamber of the BKZ-420 boiler. When plasma processing of fuel is observed, the location of the core of the torch is shifted and the length of the zone of maximum temperatures increases. The increase in flame temperature during the burning of 3 activated streams

occurs faster, and the temperature value differs to a greater extent in the burner belt. The minimum on the curves are related to the low temperature of the air mixture entering the combustion chamber through burners not equipped with plasma systems. In general, there is a lack of sharp temperature drops across the entire height of the combustion chamber, which indicates the stability of the combustion process.

a) traditional fuel combustion (without PFS);   b) 3 PFS;
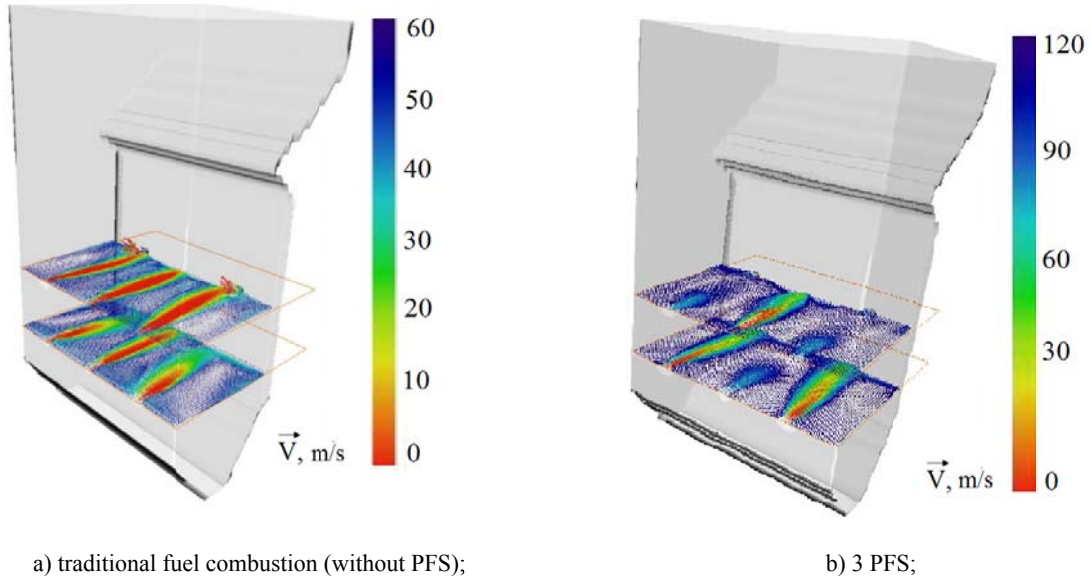
Fig. 2. Vector field of full velocity in the area of the burner belt of
the combustion chamber of the boiler BKZ-420

a) traditional fuel combustion (without PFS);   b) 3 PFS;
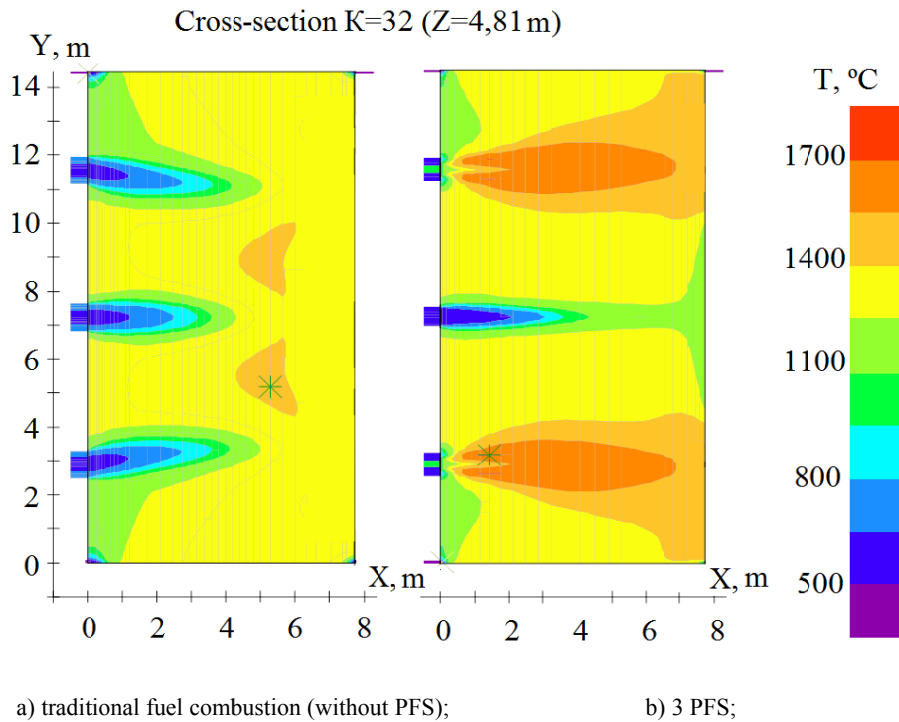
Fig. 3. Temperature field in the section plane of the burners of the lower tier of the combustion chamber of the boiler BKZ-420
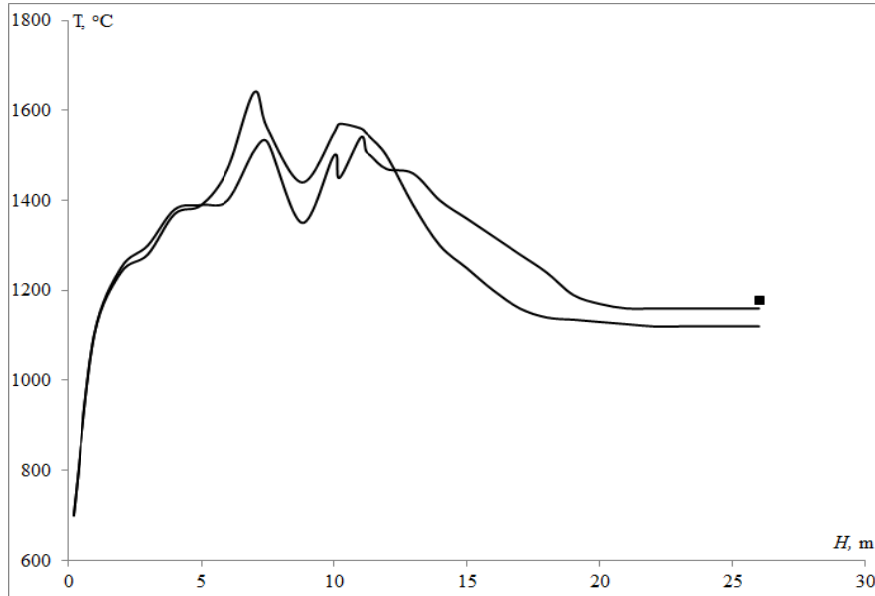
1 – traditional fuel combustion (without PFS); **2** – 3 PFS;
■ - experiment [30]

Fig. 4. Temperature distribution along the height of the
combustion chamber of the boiler BKZ-420
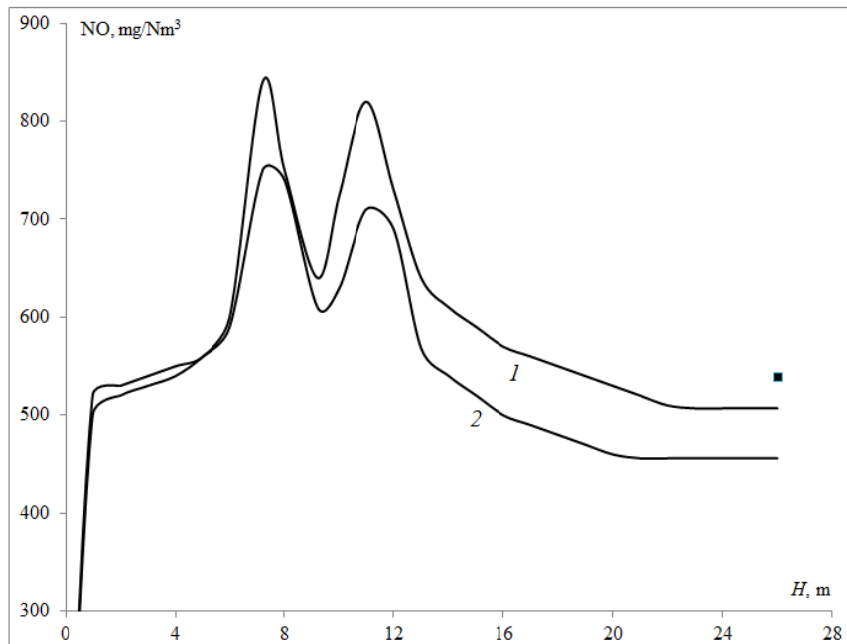
1 – traditional fuel combustion (without PFS); **2** – 3 PFS;
■ - experiment [30]

Fig. 5. The distribution of the concentration of nitrogen oxides NO at the height
of the combustion chamber of the boiler BKZ-420

Figure 5 shows the fields of concentrations of nitrogen oxides NO along the height of the combustion chambers of the boiler BKZ-420. As can be seen from Figure 5, the main NO gas formation occurs in the region of propagation of flows from the burners. Thus character of the distribution of curves in this area is ambiguous, which indicates the complex nature of the process of formation of nitrogen oxides in this area

and the effect of plasma activation on the formation of these components. We see that the use of plasma torches leads to a decrease in the total concentration of NO from the furnace space and amounts to 507 mg/Nm^3 with traditional combustion, and with 3 thermochemically activated streams – 456 mg/Nm^3. This, in turn, indicates that the reduction of nitrogen oxides NO at the exit from the furnace space when using PFS increases the ecological and economic indicators of energy facilities.

Conclusion

According to the research, the following conclusions can be formulated:

• Presents the results of 3-D computer modeling of heat and mass transfer processes during combustion of pulverized coal, which was pre-processed in the PFS.

• Research of three-dimensional temperature and concentration fields has allowed establishing the basic patterns of development of heat and mass transfer processes in the entire volume of the combustion chamber of power boilers. Satisfactory agreement of the calculated data with the results of field experiments was obtained.

• It has been established that the method of thermochemical activation of pulverized coal flows makes it possible to significantly optimize the process of burning low-grade high-ash coal in the combustion chambers of Kazakhstan's thermal power plants and significantly reduce emissions of harmful substances into the environment.

А.С. Асқарова [1-2], С.Ә.Бөлегенова [1-2], П. Шафаржик[3],
В.Ю. Максимов[1], С.Ә. Бөлегенова[2], А.О. Нұғыманова[2]

[1] Әл-Фараби атындағы Қазақ ұлттық университетін физика-техникалық факультеті,
әл-Фараби атындағы ҚазҰУ, Алматы, Қазақстан;
[2] Әл-Фараби атындағы Қазақ ұлттық университетіне қарасты эксперименталдық және теориялық физиканың ғылыми-зерттеу институты, әл-Фараби атындағы ҚазҰУ ЭТФ ҒЗИ, Алматы, Қазақстан;
[3] Прага қ. Чех Техникалық университетінің сұйық динамикасы мен термодинамика факультеті, Прага қ. Чех Техникалық университеті, Прага, Чех Республикасы

АКТИВТЕНДІРІЛГЕН ТЕРМОХИМИЯЛЫҚ ОТЫННЫҢ ЖАНУЫН 3D МОДЕЛЬДЕУ

Аннотация. Мақалада жану камераларында қатты отынды жағуда плазма термохимиялық дайындау процестерін сандық зерттеу нәтижелері келтірілген. Сандық есептеу эксперименттерін жүргізу кезінде қазанның кеңістіктегі жылу және масса тасымалдау процестерінің ақпараттық технологиялары мен 3-D компьютерлік модельдері қолданылды. Нақты жану камерасында орын алатын турбулентті ағыстардағы конвективті жылу және массалық кешенді процестердің толық сипаттамасын беретін қазіргі заманғы сандық әдістермен химиялық реакциялардың қатысуымен алынды. Объектінің барлық көлеміндегі жану үдерісі үш өлшемді температура мен концентрация өрістерін зерттеуде даму моделін құруға мүмкіндік берді. Толық ауқымды эксперименттердің белгілі нәтижелерімен есептелген деректердің қанағаттанарлық сәйкестік алынды. Мақаланың авторлары қатты отын жануының физика-химиялық процестерінің негізгі сипаттамаларында шаңтозаңды көмір ағынын плазмалық термохимиялық өңдеудің әсерін зерттеді. Көмір ағынының термохимиялық активтендіру әдісі Қазақстанның жылу электр станцияларының жану камераларында жанғыш күлді көмірді көму үдерісін едәуір оңтайландыруға мүмкіндік береді, қоршаған ортаға зиянды заттар шығарындыларын едәуір азайтады және энергетикалық қондырғыларда «таза» энергетикаға қол жеткізуге мүмкіндік береді.

Түйін сөздер. Жылулық массатасымалдау, жану, көмір, плазмалық белсендіру, ағын аэродинамикасы, тұтқындар және температуралық өрісі, залалды заттардың шығарылу

А.С. Аскарова 1-2, С.А. Болегенова 1-2, П. Шафарик3, В.Ю. Максимов1, С.А. Болегенова 2, А.О. Нұғыманова 1*

1Казахский Национальный Университет имени аль-Фараби, физико-технический факультет, г. Алматы, Казахстан;

2 Научно-исследовательский институт экспериментальной и теоретической физики (НИИЭТФ), г. Алматы, Казахстан;

3 Чешский технический университет в Праге, факультет динамики жидкости и термодинамики, г.Прага, Чешская Республика

3D МОДЕЛИРОВАНИЕ ГОРЕНИЯ ТЕРМОХИМИЧЕСКИ АКТИВИРОВАННОГО ТОПЛИВА

Аннотация. В данной статье представлены результаты численных исследований процессов плазменной термохимической подготовки твердых топлив к сжиганию в камерах сгорания. При проведении вычислительных экспериментов были применены новейшие информационные технология и метод 3-D компьютерного моделирования процессов тепломассопереноса в топочном пространстве. Получены основные закономерности конвективного тепломассопереноса в турбулентных течениях при наличии химических реакций с использованием современных численных методов, дающих полное описание сложных процессов, имеющих место в реальной топочной камере. Исследование трехмерных температурных и концентрационных полей позволило установить закономерности развития процесса горения во всем объеме исследуемого объекта. Получено удовлетворительное согласие расчетных данных с известными результатами натурных экспериментов. Авторами статьи впервые исследовано влияние плазменной термохимической обработки пылеугольных потоков на основные характеристики физико-химических процессов горения твердого топлива. Установлено, что метод термохимической активации пылеугольных потоков позволяет в значительной степени оптимизировать процесс сжигания низкосортных высокозольных казахстанских углей в топочных камерах ТЭС Казахстана, существенно снизить выбросы вредных веществ в окружающую среду и создать способ получения «чистой» энергии на энергетических объектах.

Ключевые слова. Тепломассоперенос, горение, твердое топливо, плазменная активация, аэродинамика течения, концентрационные и температурные поля, выбросы вредных веществ.

Information about authors:

Askarova Aliya – Doctor of Physical and Mathematical Sciences, Professor, Head of the Laboratory for Simulation of Heat and Mass Transfer, al-Farabi Kazakh National University. The author made a significant contribution to the concept and design of the research, data acquisition or their analysis and interpretation. The author approved the final version of the article before submitting it for publication.
E-mail: aliya.askarova@kaznu.kz

Bolegenova Saltanat – Doctor of Physics and Mathematics, Professor, Head of the Department of Thermophysics and Technical Physics, al-Farabi Kazakh National University. The author made a significant contribution to the concept and design of the research, data acquisition or their analysis and interpretation. The author approved the final version of the article before submitting it for publication.
E-mail: Saltanat.bolegenova@kaznu.kz

Safarik Pavel – Doctor of Physics and Mathematics, Professor at the Czech Technical University in Prague, Prague, Czech Republic. The author made a significant contribution to the concept and design of the research, data acquisition or their analysis and interpretation.
E-mail: Pavel.Safarik@fs.cvut.cz

Maximov Valeriy – PhD, Senior Lecturer, Department of Thermal Physics and Technical Physics, al-Farabi Kazakh National University. The author has written the first version of the article or its critical review for important intellectual content.
E-mail: valeriy.maximov@kaznu.kz

Bolegenova Symbat – PhD, Deputy dean for educational, methodical and educational work Al-Farabi Kazakh National University. The author has written the first version of the article or its critical review for important intellectual content.
E-mail: Symbat.bolegenova@kaznu.kz

Nugymanova Aizhan – PhD student, Senior Lecturer, Department of Thermal Physics and Technical Physics, al-Farabi Kazakh National University. The author made a significant contribution to the concept and design of the research, data acquisition or their analysis and interpretation.
E-mail: aizhan.nugymanova @kaznu.kz

REFERENCES

[1] Leithner R, Ergalieva A, Gabitova Z, etc (**2016**) Computational modeling of heat and mass transfer processes in combustion chamber at power plant of Kazakhstan. Proceedings MATEC Web of Conferences, 76:UNSP06001 DOI:10.1051/matecconf/20167606001.

[2] Askarova A, Bolegenova SA, Beketayeva MT, etc (**2018**) Modeling of heat and mass transfer in high-temperature reacting flows with combustion. Journal High Temperature, 56(5):738-745. DOI: 10.1134/S0018151X1805005X.

[3] Manatbayev R, Shortanbayeva ZhK, Maksutkhanova AM, Aldiyarova AN, etc (**2016**) Mathematical modeling of heat and mass transfer in the presence of physical-chemical processes. Proceeding of 15th international scientific conference on renewable energy and Innovate Technologies, Tech Coll Smolyan, Smolyan, Bulgaria, Bulgarian Chemical Communications, 48(E):272-277.

[4] Pilipenko NV, Shortanbayeva ZhK, Baktybekov KS, etc (**2018**) Investigation of the different Reynolds numbers influence on the atomization and combustion processes of liquid fuel. Bulgarian Chemical Communications, 50(G):68 - 77

[5] Askarova A, Bolegenova S, Shortanbaeva ZhK, etc (**2017**) Numerical modeling of burning pulverized coal in the combustion chamber of the boiler PK 39. News of the national academy of sciences of the Republic of Kazakhstan-series physico-mathematical, 2(312):58-63.

[6] Gabitova Z, Yergaliyeva A, Shortanbayeva Zh, etc (**2017**) Simulation of the aerodynamics and combustion of a turbulent pulverized-coal flame. Proceedings of 4th International Conference on Mathematics and Computers in Sciences and in Industry (MCSI 2017). Corfu Island, Greece. P.92-97. DOI: 10.1109/MCSI.2017.23.

[7] Turbekova AG, Beisenov KhI, Maxutkhanova AM, etc (**2017**) A computational experiment for studying the combustion of thermochemically-gasified coal in the combustion chamber of the boiler BKZ-160. News of the national academy of sciences of the Republic of Kazakhstan-series physico-mathematical, 2(312):78-80 DOI: 10.1515/eng-2018-0020.

[8] Bekmuhamet A, Maximov V Yu., etc (**2012**) Mathematical simulation of pulverized coal in combustion chamber. Procedia Engineering, 42:1150-1156. DOI: 10.1016/j.proeng.2012.07.507.

[9] Askarova AS, Safarik P, Beketayeva MT, etc (**2018**) Modern computing experiments on pulverized coal combustion processes in boiler furnaces, News of the national academy of sciences of the Republic of Kazakhstan-series Physico-mathematical, 6(322): 5-14 DOI: 10.32014/2018.2518-1726.11.

[10] Gabitova ZKh, Bekmukhamet A, Beketayeva MT, etc (**2015**) Computational method for investigation of solid fuel combustion in combustion chambers of a heat power plant. Journal High Temperature, 5(5):751-757. DOI: 10.1134/S0018151X15040021.

[11] Maxutkhanova A, Shortanbayeva Zh, Boranbayeva A, etc (**2016**) Application of 3D modelling for solving the problem of combustion coal-dust flame. Proceeding of 15th international scientific conference on renewable energy and Innovate Technologies, Tech Coll Smolyan, Smolyan, Bulgaria, Bulgarian Chemical Communications, 48(E):236-241.

[12] Georgiev A, Manatbayev RK, Baizhuma ZhT, etc (**2018**) The use of a new "clean" technology for burning low-grade coal in on boilers of Kazakhstan TPPs. Bulgarian Chemical Communications, 50(G):53 – 60.

[13] Messerle VE, Ustimenko AB, Nagibin, AO, etc (**2010**) Pulverized coal torch combustion in a furnace with plasma-coal system. Journal Thermophysics and Aeromechanics, 17(3):435-444. DOI: 10.1134/S0869864310030145

[14] Messerle VE, Ustimenko AB, etc (**2014**) Numerical simulation of the coal combustion process initiated by a plasma source. Journal Thermophysics and Aeromechanics, 21(6):747-754. DOI: 10.1134/S0869864314060092.

[15] Karpenko EI, Messerle VE, Ustimenko AB, etc (**2006**) Plasma enhancement of combustion of solid fuels. Journal of High Energy Chemistry, 40(2):111-118. DOI: 10.1134/S0018143906020081.

[16] Bekmuhamet A, Beketayeva M, Ergalieva A, etc (**2016**) 3D modeling of heat and mass transfer during combustion of solid fuel in BKZ-420-140-7C combustion chamber of Kazakhstan. Journal of Applied Fluid Mechanics, 9(2):699-709.

[17] Buchmann M, Askarowa A (**1997**) Structure of the flame of fluidized-bed burners and combustion processes of high-ash coal. Proceedings of 18th Dutch-German Conference on Flames, VDI Berichte, 1313:241-244.

[18] Heierle EI, Manatbayev RK, Yergaliyeva AB, etc (**2016**) CFD study of harmful substances production in coal-fired power plant of Kazakhstan. Proceedings of 15th International Scientific Conference on Renewable Energy and Innovative Technologies: Tech Coll Smolyan, Smolyan, Bulgaria, Bulgarian Chemical Communications, 48(E2):260-265.

[19] Gorokhovski M, Chtab-Desportes A, Voloshina I, (**2010**) Stochastic simulation of the spray formation assisted by a high pressure. AIP Conference Proceedings, 1207:66-73

[20] Messerle VE, Ustimenko AB, etc (**2015**) Numerical simulation of pulverized coal combustion in a power boiler furnace, Journal High Temperature, 53(3):445-452. DOI: 10.1134/S0018151X15020030.

[21] Vockrodt S, Leithner R, Schiller A, (**1999**) Firing technique measures for increased efficiency and minimization of toxic emissions in Kasakh coal firing. Proceedings of 19th German Conference on Flames, Dresden, Germany VDI Gesell Energietechn; Verein Deutsch Ingn.Combustion and incineration, 1492:93-97. (in Eng).

[22] Karpenko EI, Messerle VE, Ustimenko AB, etc (**2007**) Mathematical modeling of the processes of solid fuel ignition and combustion at combustors of the power boilers. Proceedings of the 7th International Fall Seminar on Propellants, Explosives and Pyrotechnics, Xian, 7:672-683.

[23] Ospanova ShS, Askarova A, Bolegenova SA, etc (**2017**) Investigation of aerodynamics and heat and mass transfer in the combustion chambers of the boilers PK-39 and BKZ-160. News of the national academy of sciences of the Republic of Kazakhstan-series physico-mathematical, 2(322):5-14.

[24] Mazhrenova N, Manatbayev R, Ospanova S., etc (**2016**) 3D modelling of heat and mass transfer processes during the combustion of liquid fuel, Proceedings of 15th International Scientific Conference on Renewable Energy and Innovative Technologies, Tech Coll Smolyan, Smolyan, Bulgaria, Bulgarian Chemical Communications, 48(E):229-235.

[25] Messerle VE, Ustimenko AB, et al. (**2016**) Reduction of noxious substance emissions at the pulverized fuel combustion in the combustor of the BKZ-160 boiler of the Almaty heat electro power station using the "Overfire Air" technology. Journal Thermophysics and Aeromechanics, 23(1):125-134. DOI: 10.1134/S0869864316010133.

[26] Bekmuhamet A, Ospanova ShS., etc (**2012**) Numerical research of aerodynamic characteristics of combustion chamber BKZ-75 mining thermal power station. Procedia Engineering, 42:1250-1259. DOI: 10.1016/j.proeng.2012.07.517.

[27] Beketayeva M, Gabitova Z, Bekmukhamet A., etc (**2014**) Control harmful emissions concentration into the atmosphere of megacities of Kazakhstan Republic. International conference on Future Information Engineering, Beijing, Peoples China, 10:252-258. DOI: 10.1016/j.ieri.2014.09.085.

[28] Berezovskaya I, Yergaliyeva A, Shortanbayeva Zh, Gabitova Z, etc (**2017**) Experimental study of complex combustion progress in higher education. Proceedings of 2nd International conference on Education, Management and Systems, Beijing, Peoples China, 377-381.

[29] Manatbayev RK, Beketayeva MT, Ospanova ShS, et.al. (**2018**) The computational study of heat and mass transfer processes at combustion of pulverized kazakh coal in real conditions of energy objects. Journal Bulgarian Chemical Communications, 50(G):61- 67.

[30] Alijarov BK, Alijarova MB (**2012**) Szhiganie kazahstanskih uglej na TJeS i na krupnyh kotel'nyh: opyt i perspektivy. RGP Gylym ordasy, Kazakhstan.

Publication Ethics and Publication Malpractice
in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see http://www.elsevier.com/publishingethics and http://www.elsevier.com/journal-authors/ethics.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see http://www.elsevier.com/postingpolicy), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service http://www.elsevier.com/editors/plagdetect.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайтах:

www:nauka-nanrk.kz

http://physics-mathematics.kz/index.php/en/archive

ISSN 2518-1726 (Online), ISSN 1991-346X (Print)

Редакторы *М. С. Ахметова, Т.А. Апендиев, Д.С. Аленов*
Верстка на компьютере *А.М. Кульгинбаевой*

Подписано в печать 10.04.2019.
Формат 60х88 1/8. Бумага офсетная. Печать – ризограф.
5,8 п.л. Тираж 300. Заказ 2.

Национальная академия наук РК
050010, Алматы, ул. Шевченко, 28, т. 272-13-18, 272-13-19